



Technical Service Information




61-36265-00/-10/-20/-30/-40/-50/-60/-70/-75 PSA & others



- 9HX (DV6ATED4)
- 9HY (DV6TED4)
- 9HZ (DV6TED4)
- DV6B

Cylinder-head gaskets for the DV6 1.6 L PSA diesel engine are available in various thicknesses depending on the piston protrusion.

The table specifies the "number of notches/holes" (= thickness identification). The illustrations below will help you to determine which gasket thickness is needed.

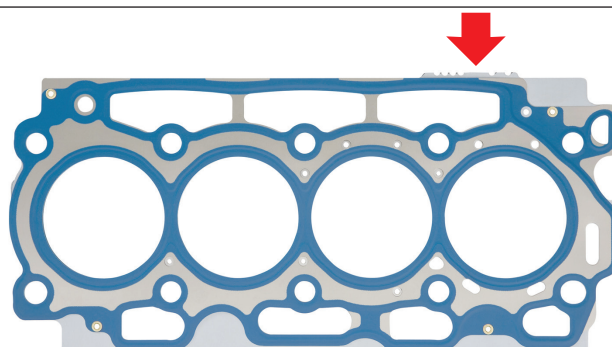

Nominal dimension				
Item No.	Picture of notches	Number of notches	OE No.	Thickness
61-36265-00		2 + (2) = 4	0209.CA	1,25 mm
61-36265-10		3 + (2) = 5	0209.CC	1,30 mm
61-36265-20		1 + (2) = 3	0209.CE	1,35 mm
61-36265-30		4 + (2) = 6	0209.CF	1,40 mm
61-36265-40		5 + (2) = 7	0209.CG	1,45 mm

Repair dimension				
Item No.	Picture of notches	Number of notches	OE No.	Thickness
61-36265-50		3 + (2) = 5	0209.HG	1,50 mm
61-36265-60		4 + (2) = 6	0209.HF	1,55 mm
61-36265-70		2 + (2) = 4	0209.HE	1,60 mm
61-36265-75		3 + (2) = 5	0209.HC	1,65 mm

VICTOR REINZ – Just seal it!